

LUMINÁRIA FLUORESCENTE DE PAREDE





Características Técnicas:

- . Fabricada em chapa de aço galvanizado ou aço inoxidável;
- . Cabeceiras em policarbonato injetado na cor branca;
- . Difusor plano de acrílico ou policarbonato transparente;
- . Porta-lâmpadas anti-vibratórios tipo G13;
- . 2 entradas com buchas protetoras de borracha com furo de Ø12mm cada;
- . Interruptor e tomada padrão brasileiro 250V 10A ou 20A;
- . Fixação através de 4 furos com Ø5mm cada;
- . Acabamento em pintura eletrostática na cor branca.



Sugestão de uso: Para uso em banheiros, espelhos, acomodações internas, escrivaninhas, corredores e escadas de embarcações navais.

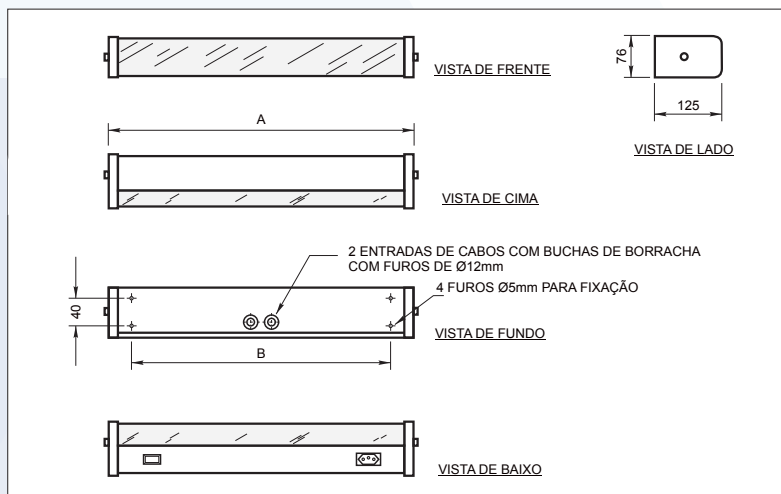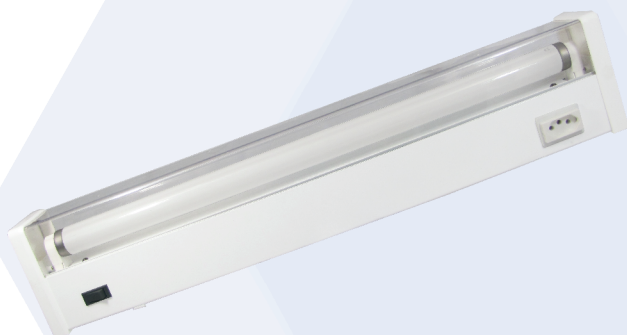

Indicado para indústria Naval / Offshore, Química, Petroquímica, Farmacêutica e em locais onde se requer resistência a choques mecânicos, tempo, gases, vapores e pó (TGVP).

MODELO	Nº LÂMPADAS X POTÊNCIA	REATOR	TENSÃO	PESO APROXIMADO
EN-308.1.1	1x15W	AFP Bivolt	127Vca	1,670Kg
EN-308.1.2	1x15W	AFP Bivolt	220Vca	1,670Kg
EN-308.2.1	1x18(20)W	AFP Bivolt	127Vca	2,030Kg
EN-308.2.2	1x18(20)W	AFP Bivolt	220Vca	2,030Kg

DIMENSÕES (mm)		
CÓDIGO	A	B
EN-308.1	505	330
EN-308.2	655	450

Imagens meramente ilustrativas. Produtos sujeitos a disponibilidade de estoque.



WALL FLUORESCENT LIGHT



Technical Features:

- . Made in galvanized steel sheet or stainless steel;
- . Headband in injected polycarbonate white color;
- . Diffuser in acrylic or clear polycarbonate;
- . G13 socket anti vibratory;
- . 2 entries whit protector rubber plugs Ø12mm;
- . Switch and socket brazilian new standand 250V 10A or 20A;
- . Fixed by 4 holes Ø5mm;
- . Finish whit color eletrostatic paint;

Suggested use: Used in bathrooms, mirrors, internal accommodations, writing desk, corridors and ladder of naval vessels.

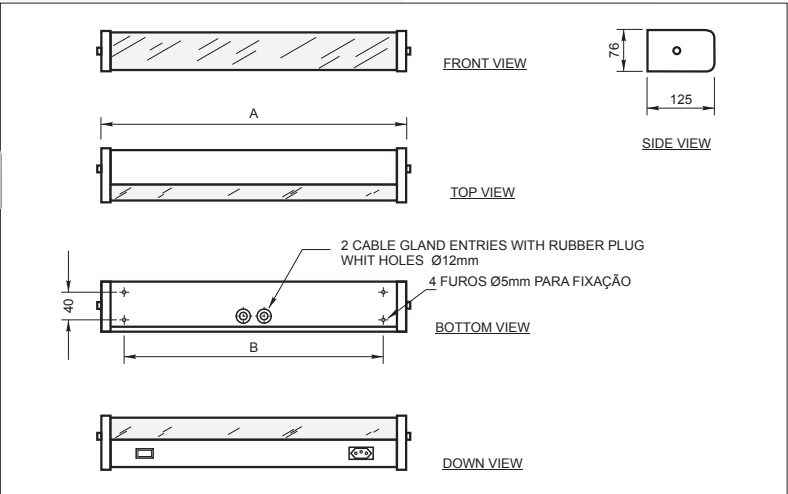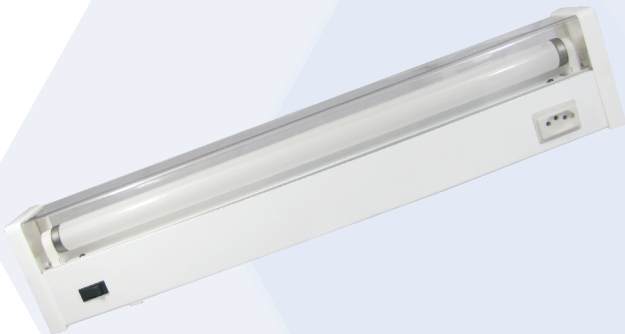

Indicated for Naval/Offshore industries, chemical, petrochemical and pharmaceutical where mechanical shock resistance ,weather, gas, steam and dust resistance are required (non classified areas).

MODEL	N° LAMPS X CAPACITY	BALLAST	VOLTAGE	ESTIMATED WEIGHT
EN-308.1.1	1x15W	AFP Bivolt	127Vca	1,670Kg
EN-308.1.2	1x15W	AFP Bivolt	220Vca	1,670Kg
EN-308.2.1	1x18(20)W	AFP Bivolt	127Vca	2,030Kg
EN-308.2.2	1x18(20)W	AFP Bivolt	220Vca	2,030Kg

DIMENSIONS (mm)		
CODE	A	B
EN-308.1	505	330
EN-308.2	655	450

Photo for illustration only.