

**PROJETOR ESTANQUE PARA USO GERAL**





**Características Técnicas:**

- . Corpo fabricado em aço inoxidável;
- . Refletor em alumínio de alta pureza;
- . Parafusos e acessórios em aço inoxidável 316;
- . Fechos de alta pressão;
- . Vidro plano cristal temperado resistente a impactos e choques térmicos;
- . Fixação através de 2 furos com Ø11mm cada e/ou 3 furos com Ø14mm;
- . Prensa-cabo de latão M25 para cabos de Ø10-12,5mm ;
- . Gaxetas de vedação em silicone;
- . Ajuste na posição de 90° para cima e/ou 45° para baixo;
- . Facho aberto;
- . Acabamento em pintura eletrostática na cor branca.



Sugestão para uso: Iluminação em geral de áreas externas em embarcações, estaleiros, armazéns e estádios.

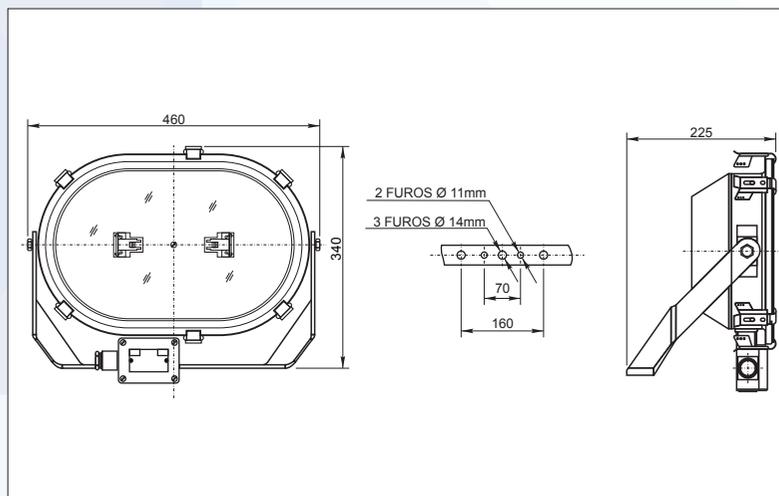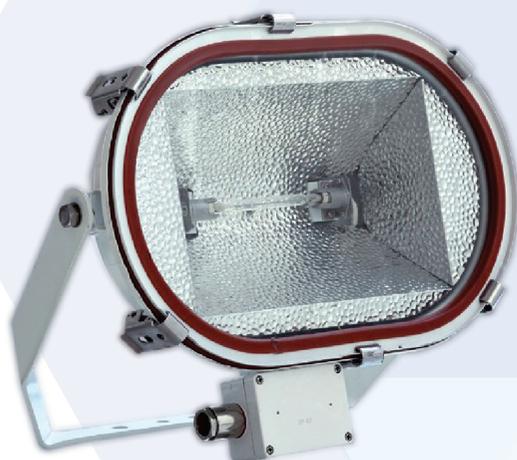

Indicado para indústria Naval / Offshore, Química, Petroquímica, Farmacêutica e em locais onde se requer resistência a choques mecânicos, tempo, gases, vapores e pó (TGVP).

Peso aproximado: 5,800kg.

MODELO	SOQUETE	LÂMPADA	POTÊNCIA
EN-510.1	R7s	HALÓGENA PALITO	100W
EN-510.2	R7s	HALÓGENA PALITO	150W
EN-510.3	R7s	HALÓGENA PALITO	200W
EN-510.4	R7s	HALÓGENA PALITO	300W
EN-510.5	R7s	HALÓGENA PALITO	500W

Imagens meramente ilustrativas. Produtos sujeitos a disponibilidade de estoque.

**WATERPROOF FLOODLIGHT FOR GENERAL USE**



**Technical Features:**

- . Body in stainless steel;
- . Reflector in aluminum high purity;
- . Bolts and locks in stainless steel 316;
- . High pressure lockers;
- . Flat tempered crystal glass resistant to impacts and thermal shocks;
- . Fixed by 2 holes Ø11mm and/or 3 holes Ø14mm;
- . Brass cable gland M25 for cables Ø10-12,5mm;
- . Sealing gasket in silicone;
- . Set position 90° up and/or 45° down;
- . Wide beam;
- . Finishing in eletrostatic paint in white color.



Suggested use: Lighting in general in outside areas of vessels, shipyards, warehouse and stadiums.

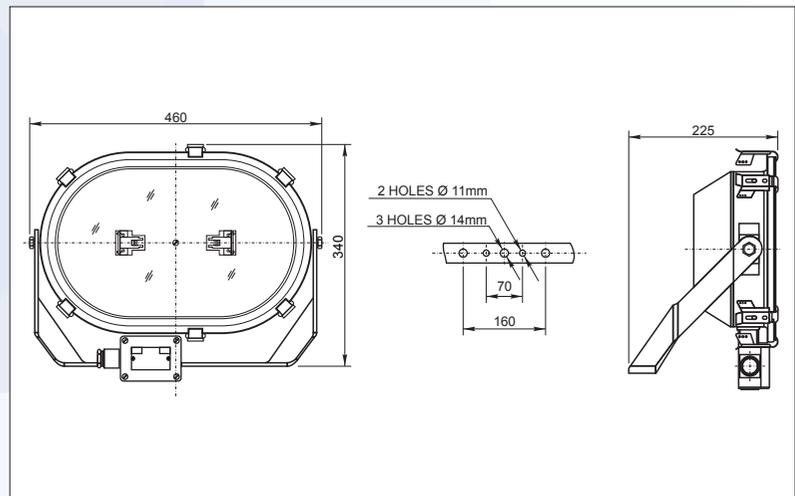
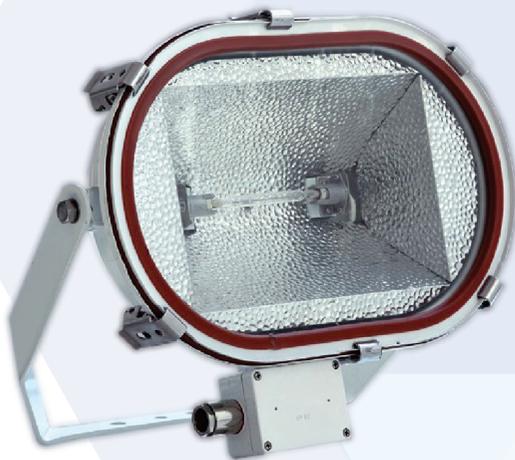


Photo for illustration only.

Indicated for Naval/Offshore industries, chemical, petrochemical and pharmaceutical where mechanical shock resistance ,weather, gas, steam and dust resistance are required (non classified areas).

Estimated Weight: 5,800kg

MODEL	SOCKET	LAMP	VOLTAGE X POWER
EN-510.1	R7s	HALOGEN STICK	100W
EN-510.2	R7s	HALOGEN STICK	150W
EN-510.3	R7s	HALOGEN STICK	200W
EN-510.4	R7s	HALOGEN STICK	300W
EN-510.5	R7s	HALOGEN STICK	500W