

PROJETOR ESTANQUE PARA USO GERAL





Características Técnicas:

- . Fabricado em liga de alumínio fundido;
- . Refletor interno em chapa alumínio alto brilho;
- . Vidro plano cristal temperado resistente a impactos e choques térmicos;
- . Parafusos e acessórios em aço inoxidável 316;
- . Suporte de fixação com 3 furo de Ø15mm galvanizado a fogo com o movimento horizontal e vertical;
- . Prensa-cabo 3/8" BSP para cabos de Ø8-10mm;
- . Gaxetas de vedação em silicone;
- . Facho aberto;
- . Acabamento em pintura eletrostática na cor cinza claro.



Sugestões para uso: Iluminação em geral de áreas externas em embarcações, estaleiros, armazéns e estádios.

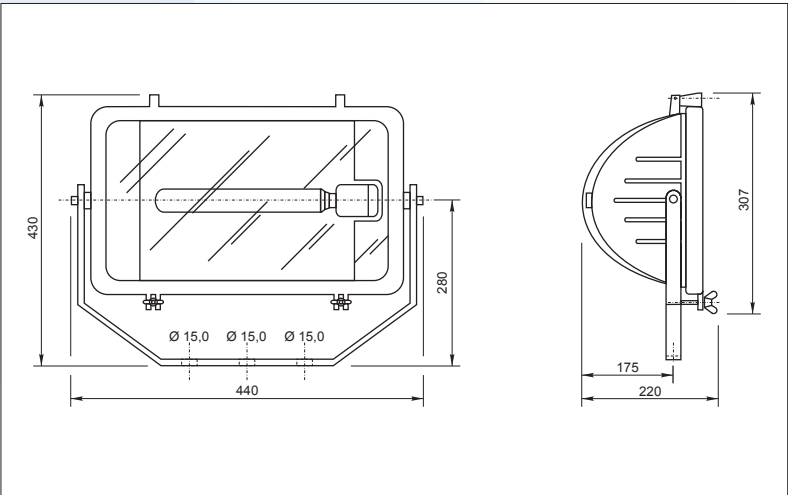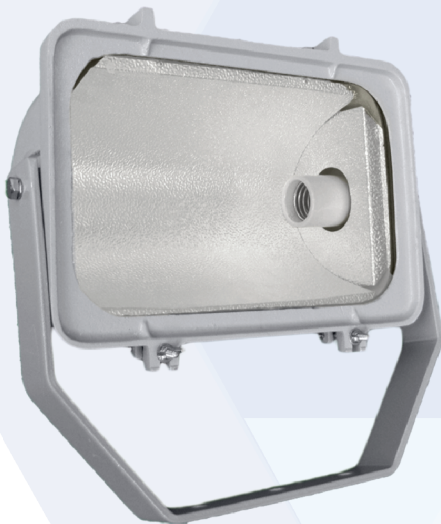

Indicado para indústria Naval / Offshore, Química, Petroquímica, Farmacêutica e em locais onde se requer resistência a choques mecânicos, tempo, gases, vapores e pó (TGVP).

Peso aproximado: 8,140kg.

MODELO	SOQUETE	LÂMPADA	POTÊNCIA
EN-513.1	E-40	HALÓGENA DUPLO ENVELOPE	500W
EN-513.2	E-40	HALÓGENA DUPLO ENVELOPE	1000W
EN-513.3	E-40	VAPOR DE SÓDIO	250W
EN-513.4	E-40	VAPOR DE SÓDIO	400W
EN-513.5	E-40	VAPOR METÁLICO	250W
EN-513.6	E-40	VAPOR METÁLICO	400W
EN-513.7	E-40	VAPOR MERCÚRIO	250W
EN-513.8	E-40	MISTA	250W
EN-513.9	E-40	MISTA	500W

Imagens meramente ilustrativas. Produtos sujeitos a disponibilidade de estoque.

WATERPROOF FLOODLIGHT FOR
GENERAL USE



Technical Features:

- . Made in cast aluminum alloy;
- . Reflector internal plate in brightness aluminum;
- . Bolts and accessories in stainless steel 316;
- . Flat tempered crystal glass resistant to impacts and thermal shocks;
- . Fixing support with 3 holes Ø15mm galvanized with horizontal and vertical movements;
- . Cable gland 3/8" BSP for cable Ø8 - 10mm;
- . Sealing gasket in silicone;
- . Wide beam;
- . Finishing in eletrostatic paint in clear gray color.



Suggested use: Lighting in general in outside areas of vessels, shipyards, warehouse and stadiums.

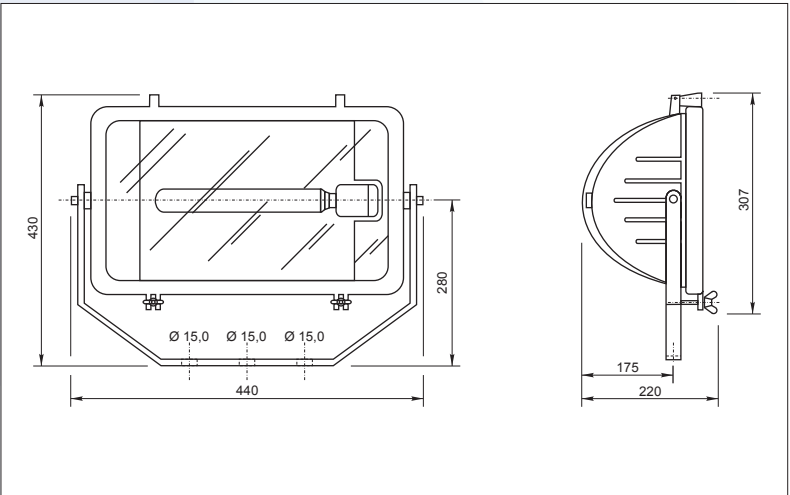
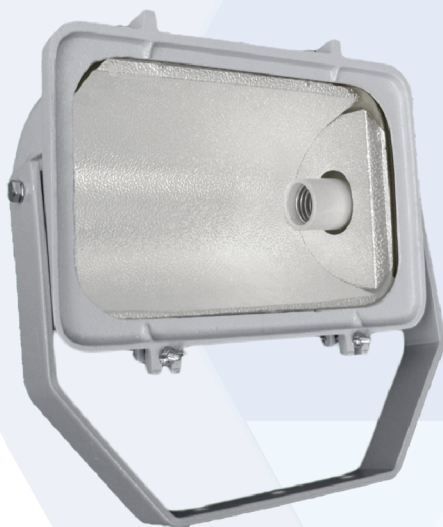


Photo for illustration only.

Indicated for Naval/Offshore industries, chemical, petrochemical and pharmaceutical where mechanical shock resistance ,weather, gas, steam and dust resistance are required (non classified areas).

Estimated Weight: 8,140kg

MODEL	SOCKET	LAMP	POWER
EN-513.1	E-40	DOUBLE ENVELOPE HALOGEN	500W
EN-513.2	E-40	DOUBLE ENVELOPE HALOGEN	1000W
EN-513.3	E-40	SODIUM VAPOUR	250W
EN-513.4	E-40	SODIUM VAPOUR	400W
EN-513.5	E-40	METALLIC VAPOUR	250W
EN-513.6	E-40	METALLIC VAPOUR	400W
EN-513.7	E-40	MERCURY VAPOUR	250W
EN-513.8	E-40	BLENDED LAMP	250W
EN-513.9	E-40	BLENDED LAMP	500W