

CHAVE ROTATIVA COM BOTÃO DE COMANDO ESTANQUE




Características Técnicas:

- . Fabricada em policarbonato injetado anti-chamas (V0), anti-estático, resistente a raios ultravioleta (UV), impactos e salinidade;
- . Parafusos em aço inoxidável 316L a prova de perda;
- . Prensa- cabos em policarbonato injetado de 3/4" BSP para cabos de Ø8 a 14mm;
- . Gaxetas de vedação em neoprene resistentes ao calor e ao envelhecimento;
- . Fixação através de 3 furos com Ø9mm cada.
- . Chave rotativa bipolar liga-desliga 90° contínuo 690V 20A.
- . Botão de comando 250V 10A (contatos NA/NF, tipo e cor do botão à definir).



Sugestões de uso: Normalmente usado em casos onde requer parada de emergência em navios com sistema de bloqueio. Mais indicado para comando e controle de motores como bombas, geradores e etc.

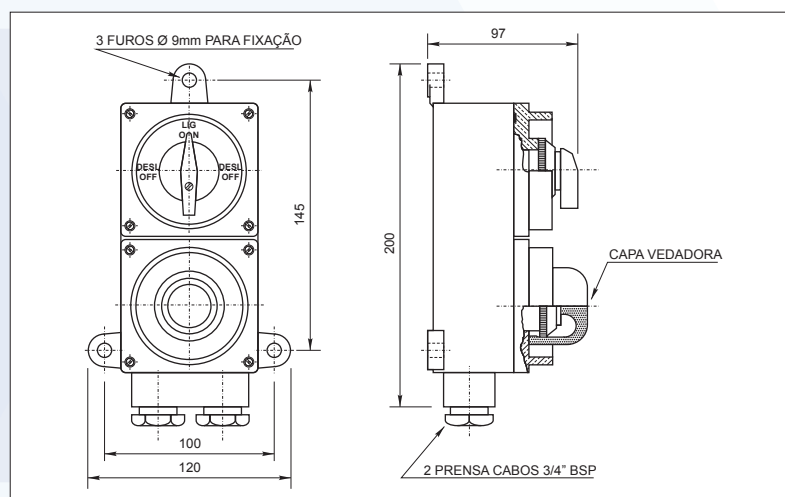

Indicado para indústria Naval / Offshore, Química, Petroquímica, Farmacêutica e em locais onde se requer resistência a choques mecânicos, tempo, gases, vapores e pó (TGVP).

Peso aproximado: 0,640kg

Fabricado nas seguintes cores pelo código Munsell:



Branco N 9.5



Cinza claro N 6.5

ROTARY SWITCH WITH WATERPROOF KNOB CONTROL




Technical Features:

- . Made in injected polycarbonate anti-flame (V0), anti-static, resistant to ultraviolet rays (UV), impacts and salinity;
- . Main bolts in stainless steel 316 anti loss;
- . 2 cable glands in injected polycarbonate 3/4" BSP for cables Ø8 up to Ø14mm;
- . Neoprene gaskets resistant to heat and aging;
- . Fixed by 3 holes Ø9mm;
- . Rotary switch ON-OFF 90° continuous 690V 20A;
- . Command button 250V 10A (Contacts NA/NF, type and color of the button to be defined).



Suggested use: Normally used in cases where emergency stop are required on ships whit lock sistem, more suitable for command and control as pumps motors, generators and etc.

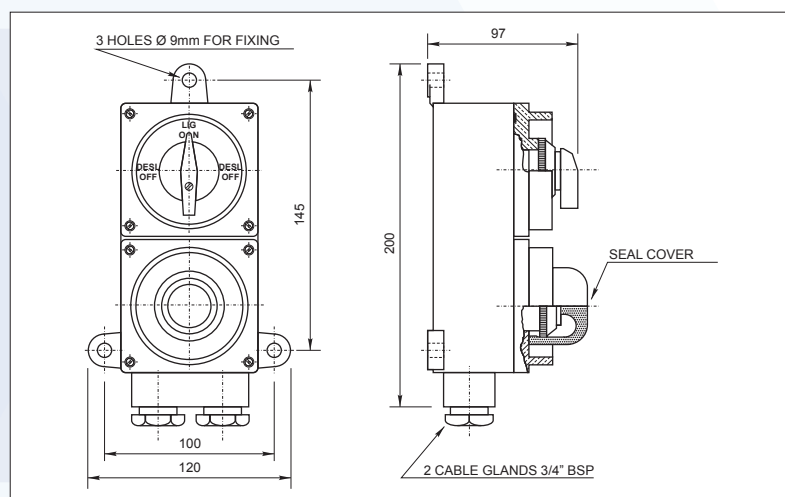

Indicated for Naval/Offshore industries, chemical, petrochemical and pharmaceutical where wheather, gas, steam and dust resistance are required (non classified areas).

Estimated Weight: 0,640kg

Manufactured in the following colors by Munsell code:



White N 9.5



Clear gray N 6.5